

### **Central Lancashire Online Knowledge (CLoK)**

Title	Intelligent airborne monitoring of man-made marine objects using Machine
	Learning techniques - Part II
Type	Article
URL	https://clok.uclan.ac.uk/id/eprint/53864/
DOI	
Date	2024
Citation	Kuru, Kaya, Clough, Stuart, Ansell, Darren, McCarthy, John and McGovern, Stephanie (2024) Intelligent airborne monitoring of man-made marine objects using Machine Learning techniques - Part II. Coordinates, 20 (11). pp. 22-30. ISSN 0973-2136
Creators	Kuru, Kaya, Clough, Stuart, Ansell, Darren, McCarthy, John and McGovern, Stephanie

It is advisable to refer to the publisher's version if you intend to cite from the work.

For information about Research at UCLan please go to <a href="http://www.uclan.ac.uk/research/">http://www.uclan.ac.uk/research/</a>

All outputs in CLoK are protected by Intellectual Property Rights law, including Copyright law. Copyright, IPR and Moral Rights for the works on this site are retained by the individual authors and/or other copyright owners. Terms and conditions for use of this material are defined in the <a href="http://clok.uclan.ac.uk/policies/">http://clok.uclan.ac.uk/policies/</a>

# Intelligent airborne monitoring of man-made marine objects using Machine Learning techniques - Part II

The objective of this study is to create a new platform for the automated detection of irregularly shaped man-made marine objects (ISMMMOs) in large datasets derived from marine aerial survey imagery. Readers may recall that we published the first part of the paper in October issue. We present here the concluding part



Kaya Kuru School of Engineering and Computing, University of Central Lancashire, Fylde Rd, Preston, Lancashire, PR12HE, UK



Stuart Clough 1 APEM Inc., 2603 NW 13th Street, 402, Gainesville, FL 32609-2835, USA



Darren Ansell School of Engineering and Computing, University of Central Lancashire, Fylde Rd, Preston, Lancashire, PR12HE, UK



John McCarthy <sup>2</sup> APEM Ltd., The Embankment Business Park, Stockport SK4 3GN, UK



Stephanie McGovern 2 APEM Ltd.. The Embankment Business Park, Stockport SK4 3GN, UK

#### 3. Experimental design

Offshore digital wildlife surveys for the offshore renewables sector are performed by APEM, capturing high quality images year round in all light conditions and up to four different sea states. The data is recorded using a wide range of advanced, high-resolution photogrammetry sensor technologies, including 35 mm and medium format sensors from a variety of manufacturers, in either multiple camera or a single camera configurations, subject to the scope of the project. These high-tech cameras, enabling a very high resolution ranging from 35MP to 50MP, are mounted in a tiny twin engine aircraft (e.g., Fig. 17) on a route where all areas of interest are monitored with geospatial data (i.e., latitude, longitude, and altitude). It is noteworthy to emphasise that we have followed the standardised way of constructing applications for real-world uses with the development phases of i) build the model using a dataset and move to the second phase if the test results are satisfactory ii) test/evaluate the model using another dataset completely different from the first dataset to observe if the test results are satisfactory without overfitting, and finally iii) let field experts evaluate the model with a completely new dataset independent from the first

and second datasets. The model can be deployed if it passes these three phases successfully. These phases are outlined in Fig. 3. The obtained results as well as their evaluation are provided in the following section. The experimental design of data utilisation and data processing phases with their targeted objectives are outlined in Table 3 regarding the APEM's database. The viability of the methodology was ensured in 4 phases.

#### Phase I. Model construction (Fig.

3 I): The proposed methodology was established using 145 images with ISMMMOs and 5000 images with no ISMMMOs acquired from the 22 surveys between 2014 and 2017, with around 250 samples from each survey. The sub samples of these surveys have around 3 million large-scale images that have been obtained from the various areas of the world in all seasons and numerous time zones. This large number of surveys enabled us to identify the broad features and parameters of aerial surveys and apply these parameters to make our methodology robust. All the steps of the model construction phase are explored in the sections above in detail. Phase II was conducted after the successful execution of Phase I by realising the targeted objectives, which is elaborated as follows. **Phase II. Test of the model** (Fig. 3 II): In addition to the dataset used for the establishment of the methodology, a test dataset was prepared. This set was composed of 55 images with ISMMMOs and 5000 images with no ISMMMOs, The test results are displayed in Table 10 A. We moved to the next phase to evaluate the system using independent datasets after the satisfactory results (Se, Sp, PPV, NPV, and ACC > 0.95) obtained in this phase.

Phase III. Evaluation using recent surveys (Fig. 3 III):
A dataset was prepared to evaluate the eligibility of the methodology. This set consists of 57 images with ISMMMOs and 5000 images with no ISMMMOs. This set is not included in the dataset used for the establishment of the methodology to observe if the methodology works as desired for other independent datasets. The test results are displayed in Table 10 B. We moved to the next phase to verify the system with field experts using other independent datasets after the satisfactory results (Se, Sp, PPV, NPV, and ACC > 0.95) obtained in this phase.

Phase IV. Validation by field experts using the most recent surveys (Fig. 3 IV): Furthermore, in an independent verification dataset, 9 more images with ISMMMOs and 50 images with no ISMMMOs in different surveys from the surveys on which the methodology was established were provided by APEM for affirming the viability of the system to observe if the methodology can work as desired for any aerial datasets. Two field experts from APEM Ltd. confirmed that the established system can meet their needs to detect ISMMMOs while performing surveys. The test results are displayed in Table 10 C. The results (*Se, Sp, PPV, NPV*, and *ACC* > 0.95) obtained in this phase were found to be highly satisfactory by the field experts.

#### 4. Results

The effectiveness of the proposed methodology in detecting images with ISMMMOs is demonstrated by several experiments performed on many aerial survey images as elaborated in Section 3. The results of these experiments are outlined in Table 10 and they are summarised in Table 11. The numerous tangible outcomes of these successful results are demonstrated in the supplementary technical reports of the paper and in Figs. 11f, 12f, 13f, 14f, 15f. With this approach, ISMMMOs can be captured with Se, Sp, PPV, NPV, and ACC values over 0.95. More specifically, 140 images out of 145, 55 images out of 57 and 9 images out of 9 in the test, evaluation and validation phases (Fig. 3) are tagged as the images with ISMMMOs successfully with a high Se over the targeted value (> 0.95) in the research, which indicates that the methodology is strong in separating positive images from negative ones in situations where it is preferable to not miss positive images. The particular results of these phases are averaged at the bottom column in Table 11. All the averages are higher than 0.95, which indicates that the required phases were completed successfully and the application is ready for real world deployment (Fig. 3). It is noteworthy to emphasise

that Precision (Pr), i. e., Positive Predictive Value -PPV = Pr = TP / (TP + FP) - is 0.9813 for the average. This high value demonstrates that the model is highly successful in assigning "Positive" images to the "Positive" class while the 'Negative" images are assigned to the "Negative" class effectively with a NPV of 0.9995. Most importantly, we calculated Matthews Correlation Coefficient (MCC) due to an unbalanced number in the classes where the number of negative values were high, which may yield misleading ACC values. The MCC, ranging from -1 to 1, was found to be 0.971, which indicates that the model is very close to a perfect prediction (i.e., 1).

During the implementation of the methodology, testing, and evaluation, it was observed that the ISMMMOs with completely white features (i.e., R=255, G=255, B=255) had difficulties being detected by our methodology since they have the same characteristics as waves with respect to HSV conversion, where zero is assigned to the S component during the conversion from RGB to HSV mode (Table 1, Table 2). In this respect, it is worth noting that the images with ISMMMOs that could not be detected during the design and development phases (Fig. 3) are these types of images. Examples of these images are presented in Appendix B (Fig. 18). We refer the readers to Fig. 13 to observe how the white parts of the wind turbine cannot be detected adequately.

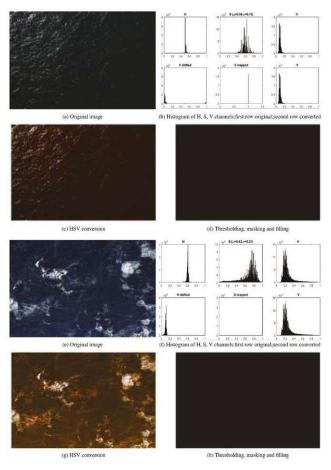


Fig. 16. Examples for blank images with no man-made objects.

#### 5. Discussion

Gibert et al. (Gibert et al., 2018) defined Data Science as a multi disciplinary field that is a combination of data analysis, data processing techniques, and domain knowledge that transforms data into comprehensible and actionable insights relevant to making informed decisions. Within this context, the objective of this study is to create a new environmental platform for the monitoring of the maritime environment by combining domain knowledge and data scientists in a productive collaboration and perform the detection of mobile and stationary ISMMMOs in an automated manner with their geospatial coordinate system. Changes in the marine ecosystem, such as habitat loss or population decreases in marine organisms, may not be readily foreseeable and it requires long term studies to reveal the environmental changes and impacts on the ecosystem and consequently to determine the required policies accordingly. Studies in marine environments, especially far offshore, are comparatively costly and require the employment of new automatic techniques and merge of different studies for field researchers. In this sense, this study intends to help authorities and



Fig. 17. APEM aircraft during an aerial survey.

researchers with the automatic detection of offshore ISMMMOs using an advanced platform to fill some of this gap.

The robustness of the platform was validated on a wide range of aerial maritime domains, providing a high level of empirical proof of concept with successful results (Table 11). Strictly speaking, the experimental results show that the proposed approach is efficient and effective for the detection and the segmentation of ISMMMOs in large scale aerial images. More specifically, the dynamic thresholding approach employed in the methodology increases Se from 0.85 to 0.97 and Sp from 0.82 to 0.99 when compared to the static optimum threshold value as displayed in Table 4. This increase is statistically significant (p < 0.01) by rejecting the null hypothesis (i.e., there is no significant difference between two results) using a paired-samples t-test. The ISMMMOs not detected by the methodology are all complete white objects. This issue is specified in Section 7 as a limitation of the study. Furthermore, the evaluation and validation results using the new data-sets (Table 10) that were not in the surveys used during the establishment of the methodology (Fig. 3) demonstrate that the methodology can work effectively on any aerial survey with high accuracy rates. In other words, during the evaluation phase, 55 out of 57 images with ISMMMOs were put into the positive folder and 4998 out of 5000 images with no ISMMMOs were placed into the negative folder. During the validation by field experts, 9 out of 9 images with ISMMMOs were put into the positive folder with all objects detected

successfully and 50 out of 50 images with no ISMMMOs were placed into the negative folder successfully. It must be noted that the developed methodology neither classifies the detected ISMMMOs into groups nor determines the recognition of them, such as "ship", "wind turbine" etc. Particular classification tools need to be developed to group the ISMMMOs that are placed in the positive directory by the proposed technique in this study, which is proposed as a future work in Section 6. Bespoke semi-supervised ML approaches (e.g., SelfMatch in (Xing et al., 2022a)) can be a good candidate for addressing this type of research question by extracting features from labelled data and comparing them with the features that are obtained from detected ISMMMOs based on the semantic information (e.g., (Xiao et al., 2022) and a feature/distance based matching scheme (e.g., (Xing et al., 2022b)) considering various pose compositions (e.g., (Çalıs kan, 2023)). The methodology not only distinguishes ISMMMOs from the blank background (sea canvas with waves in many different shapes), but also from other objects (e.g., different types of flying birds, sitting birds, big mammals (e.g., whales, dolphins), sharks, turtles, rays) in images with various shapes and characteristics successfully for which several examples can be reached in the technical report (e.g., Fig. 3 in MarineObjects\_Man-made\_ Supplement\_1.pdf) in the supplements. The results suggest that the saturation of maritime natural objects is significantly different from ISMMMOs. The processing time for each image varies from 7 s to 16 s, depending on the image size and the number of objects in the image and

Table 10: Detailed confusion matrix of the classifiers outlined in Table 11.

		A. Test Results (UCLAN) Actual Class			B. Evaluation (	UCLAN)	C. Validation (APEM)			
					Actual Class	Actual Clas				
		Positive	Negative	%	Positive	Negative	%	Positive	Negative	%
Pred	Positive Negative %	140 (TP) 5 (FN) 0.9655 (Se)	3 (FP) 4997 (TN) 0.9994 (Sp)	0.9790 (PPV) 0.9990 (NPV) <b>0.9984 (ACC)</b>	55 (TP) 2 (FN) 0.9649 (Se)	2 (FP) 4998 (TN) 0.9996 (Sp)	0.9649 (PPV) 0.9996 (NPV) <b>0.9992 (ACC)</b>	9 (TP) 0 (FN) 1 (Se)	0 (FP) 50 (TN) 1 (Sp)	1 (PPV) 1 (NPV) 1 (ACC)

Table 11: Test, evaluation and validation results in summary detailed in Table 10.

Phase	Positive	Negative	TP	FN	TN	FP	Se	SP	PPV	NPV	ACC	Location	Check
Test	145	5000	140	5	4997	3	0.966	0.997	0.9790	0.9990	0.9984	UCLAN	1
Evaluation	57	5000	55	2	4998	2	0.965	0.999	0.9649	0.9996	0.9992	UCLAN	11
Validation	9	50	9	0	50	0	1	1	1	1	1	APEM	111
Verification	211	10,050	204	7	10,045	5	0.977	0.9987	0.9813	0.9995	0.9992	Average	1111

their sizes, which is a very fast processing time for high-pixels-per-image (HPP) images up to 50 MB based on the camera system that is explained in Section 3. The overall computational complexity of the developed algorithms is O(n log n). It is important to point out that the

supervised DL and ML approaches, designed by us in our previous work in (Kuru et al., 2023), that runs on similar images in the same surveys, can detect specific marine small natural objects (e.g., birds) in a few seconds (i.e., between 2 and 4 s). In this sense, we can

conclude that DL and ML techniques slightly outperform the proposed nonsupervised technique developed in this study considering the processing time.

The current rate of global environmental alteration necessitates the quantification of

Appendix B. Examples for objects not detected by the proposed approach

**Algorithm 3:** Function titled startSplittingManMadeObjects:Main methodology: Phases of the operations to detect man-made objects in images.

```
Data: The target directory of a survey with images (imageDir)
         Result: Two directories, one of which is for images with man-made objects, and the other is for other images.
          – >Variables:
 \textbf{2} \quad Rmin = 12.5; \\ Rmax = 1000; \\ curCount = 0; \\ counter = 0; \\ posImageCount = 0; \\ hAdjust = 180; \\ sAdjustPer = 0.25; \\ files=dir(strcat(imageDir,','*,ipg')); \\ path = 12.5; \\ hAdjustPer = 0.25; \\ hAdjustPer = 
              strcat(imageDir,'); steps = numel(files);
        foreach k=1:numel(files) do
                      file_name=files(k).name; image_name=strcat(path,file_name);
                            > Get positive image name and change it by adding _ at the end to move changed and not changed ones into same directory;
                       [pathstr,name,ext] = fileparts(file_name); name = strcat(name,'_'); new_file_name = strcat(name,ext);
                       Irgb=imread(image_name);
                       figure; imshow(Irgb);
                       index = k: index image = k:
                       newImage = HSVadjustManMade(Irgb, hAdjust,sAdjustPer); \\
10
                       imshow(newImage);
                       ImgR = newImage(:,:,3); ImgG = newImage(:,:,2); ImgB = newImage(:,:,3); [M\ N] = size(ImgR);
12

    Set location of pure red pixels;

13
                       Rmask = logical(zeros(M, N)); \\ Rmask = ((ImgR < 0.25 \& ImgG < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = logical(zeros(M, N)); \\ Rmask = ((ImgR < 0.25 \& ImgG < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = ((ImgR < 0.25 \& ImgG < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = ((ImgR < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = ((ImgR < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = ((ImgR < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = ((ImgR < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB)); \\ Rmask = ((ImgR < 0.80 \& ImgB > 0.35) \& (ImgR < (ImgB) \& ImgG < (ImgB))); \\ Rmask = ((ImgR < 0.80 \& ImgB > 0.35) \& (ImgR < 0.80 \& ImgB > 0.35) & (ImgR < 0.
                      ->Replace the pixels with some other colour;

ImgR(Rmask) = 255; ImgB(Rmask) = 255; ImgB(Rmask) = 255; ImgR(Rmask=0) = 0; ImgB(Rmask=0) = 0; ImgB(
15
16
                             >Combine into a new image;
18
                       Img\_new(:,:,1) = ImgR; Img\_new(:,:,2) = ImgG; Img\_new(:,:,3) = ImgB;
19
                       figure; imshow(Img_new);
                              >create indexed image from binary;
20
21
                       BW = im2bw(Img\_new, 0.05);
                          - >loop over ICE_threshold:
22
23
                       ICE_threshold = 0.1; ICE_sigma = 2; img_edge = edge(BW, 'canny', ICE_threshold, ICE_sigma);
                             >create 3x3 array of 1s for dilate mask;
24
                      SE = ones(3):
25
                          - >dilate image to create closed boundary for birds with incomplete boundaries defined;
26
27
                      img\_dilate = imdilate(img\_edge, SE); img\_dilate2 = imdilate(img\_dilate, SE);
28
                             >fill objects with closed boundaries;
29
                      img_fill2 = imfill(img_dilate2,'holes');
                       L = bwlabeln(img_fill2);
                      ->get the centroid of each object to use as seeds for local neighbourhood definitions;
stats = regionprops ('table', L, 'Area', 'BoundingBox', 'Centroid', 'MajorAxisLength', 'MinorAxisLength'); stats1 = regionprops (L, 'Area', 'BoundingBox', 'Centroid', 'MajorAxisLength'); statsDetected = stats1;
31
32
33
                          ->Get centers and radii of the circles:
                      centers = stats.Centroid: centers diameters = mean([stats.MaiorAxisLength stats.MinorAxisLength].2); radii = diameters/2; radiiDedected =
34
                            diameters/2; centersDetected = centers;
35

    - >count the number of objects in the image;

                       no\_objects = size(stats, 1):
37
                       if no_objects < 11 then
38
                           Rmin = 7.5;
39
                       else if no_objects > 10 && no_objects < 101 then
40
                                     Rmin = 12.5;
41
                       else
                          Rmin = 20.5;
42
                       imshow(Irgb);
44
                       for object = 1:no_objects do
                                     if (diameters(object) > Rmin*2) && (diameters(object) < Rmax*2) && (stats1(object),MajorAxisLength < Rmax*2) &&
45
                                           (stats1(object).MinorAxisLength > Rmin*2) then
                                                         > Save image x and y coordinates into variable 'seed';
47
                                                    posImageCount = posImageCount + 1; seed(object,1) = round(stats1(object).Centroid(1)); seed(object,2) =
                                                        round(stats1(object).Centroid(2));
                                                            Signify the object:
49
                                                   hold on; plot(stats1(object).Centroid(1), stats1(object).Centroid(2), 'g+'); hold off;
                      if (posImageCount > 0) then
50
51
                                     curCount = str2double(get(handles.edtPosCount, 'String'))+1; set(handles.edtPosCount, 'String', num2str(curCount));
                                        - > Save the updated image with the signified objects;
52
                                     saveHighResolution(posSubFolder,new_file_name); - > remove the original image from processing folder;
54
                                     movefile(image_name,posSubFolder); delete(image_name)
55
                       close All: clear All:
56

    Set the variable to 0 for next image;

                       posImageCount = 0;
                      -> Update the progress;
waitbar(k / steps,h,'Man-made object detection is processing...');
60 result = 'Man-made objects are tagged on the image';
```

impacts in species abundance in order to evaluate the effects on the ecosystem. To assess the extent of the decline, effective long-term surveillance of populations and trends is required, which is rarely the case for most species (Rosenberg et al., 2019). Environmental models work better when they are based on the findings of more up-to- date data analysis on specific domains. It is essential to continuously monitor species and ISMMMOs in an automated manner cost-efficiently, which necessitates the utilisation of

sophisticated equipment with effective intelligent surveillance methods. In this regard, WILDetect, which is a new non-parametric platform by utilising a combination of supervised ML and Reinforcement Learning (RL) methods, was built in our previous work in (Kuru et al., 2023) to carry out automated wildlife censuses in highly dynamic marine environments. With similar automated platforms, one of which is proposed in this research for detecting ISMMMOs, existing labour-intensive and costly

censuses performed over long periods of time can be replaced by cost-efficient and highly automated computerised systems and they can be repeated automatically in regular, shorter periods. In this way, the environmental models, equipped with near-real-time outcomes for both marine wildlife and man- made presence, can foretell future trends with more realistic projections based on human footprint, which, in turn, help mitigate the potential damaging effects of human footprint.

The large number of surveys, that were conducted in the various geographical regions and in the various time zones and seasons, on which our methodology was built, represent the key features of aerial surveys, which made our approach powerful and resilient in detecting ISMMMOs with very high accuracy rates

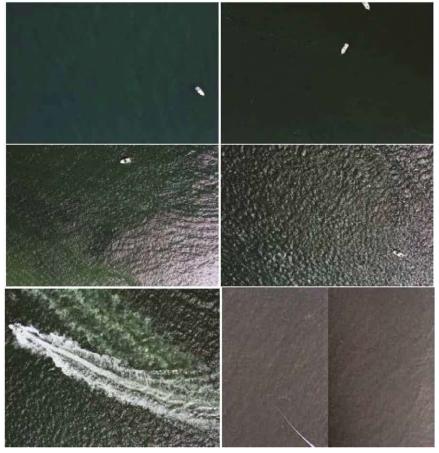


Fig. 18. Examples for objects not detected:

#### 6. Conclusions and future work

A novel methodology, the so called ISMMMOD, that detects and splits ISMMMOs automatically in largescale images in typical large marine surveys is built. The ISMMMOD is developed using the HSV colour space and statistical analysis of histograms of the channels in this space based on the ROC curve analysis. The techniques in the methodology differ man-made structures from natural maritime habitats (i.e., waves, sea animals, birds, seawater) in various aspects, in particular, composition, features of the surface and saturation of light. The large number of surveys, that were conducted in the various geographical regions and in the various time zones and seasons, on which our methodology was built, represent the key features of aerial surveys, which made our approach powerful and resilient in detecting ISMMMOs with very high accuracy rates. The successful results obtained in this research (Table 11) is an indication that using an automated computer-based system could be an effective alternative to labour-intensive approaches. The approach built in this study can be employed for several reasons, in particular, will provide researchers and policymakers with the ability to monitor maritime industries and ensure their proper deployment through the implementation of a suitable legal and regulatory framework that takes into account the changing dynamics of marine ecosystems. Additionally, this study will direct the researchers who would like to establish similar systems using unsupervised approaches.

The proposed method was tested on largescale aerial images acquired by aeroplanes and we would like to observe the results of our method on satellite images wherever datasets are available, which may reduce the cost significantly regarding the detection of ISMMMOs and may provide a real-time and quick evaluation of ISMMMOs in marine ecosystems. This study may direct other studies about the automatic classification of marine ISMMMOs. We will be developing other novel nonparametric approaches to detect maritime life (e.g., different types of flying birds, sitting birds, big mammals (e.g., whales, dolphins), sharks, turtles, rays) automatically in large number of images in surveys using supervised approaches (e.g., (Kuru et al., 2023)) to help evaluate the maritime industry and natural ecosystem together within well- prepared models. We aim to incorporate the built methodology with camera systems used in aeroplanes and unmanned aerial vehicles (UAVs) and to employ it in real-time rescue missions on high seas and open oceans as a future work, in particular, after aeroplane crashes and maritime accidents to find wreckages and survivals.

#### 7. Limitations of the study

Complete white ISMMMOs as displayed in Appendix B (Fig. 18) have the same characteristics as waves (R = 255, G = 255, B = 255) with respect to HSV conversion, in particular, saturation. As it can be readily noticed in Table 1, zero is assigned to the hue and saturation during the conversion from RGB to HSV colour space when the values for the RGB colour space is 255, 255, 255 for the three channels. Our techniques perform successfully where the hue and saturation values are distinctive (i.e., H > 0 and S > 0) and therefore, these types of objects can not be detected using the approach built in this study.

## Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

#### Data availability

Data will be made available on request.

Appendix C. Supplementary data Supplementary data to this article can be found online at https://doi. org/10.1016/j.ecoinf.2023.102285.

#### End notes

- 1 https://apem-inc.com
- 2 https://www.apemltd.co.uk
- <sup>3</sup> APEM Ltd. is an environmental company and proposes novel solutions for environmental problems (https://www.apemltd.co.uk).
- <sup>4</sup> The reports from 1 to 7 titled as MarineObjects\_Man-made\_Supplement are for ISMMMOs and the reports from 1 to 5 titled as MarineObjects\_Man-made\_ Supplement Blank are for blank images.

#### References

- [1] C. E. Elrick-Barr, J. S. Zimmerhackel, G. Hill, J. Clifton, F. Ackermann, M. Burton, E. S. Harvey, Man-made structures in the marine environment: A review of stakeholders' social and economic values and perceptions, Environmental Science & Policy 129 (2022) 12–18. doi:https://doi.org/10.1016/j.envsci.2021.12.006.
- [2] Y. Shi, C. Shen, H. Fang, H. Li, Advanced control in marine mechatronic systems: A survey, IEEE/ASME Transactions on Mechatronics 22 (3) (2017) 1121–1131. doi:10.1109/TMECH.2017.2660528.
- [3] K. Kuru, H. Yetgin, Transformation to advanced mechatronics systems within new industrial revolution: A novel framework in automation of everything (aoe), IEEE Access 7 (2019) 41395–41415. doi:10.1109/ACCESS.2019.2907809.
- [4] S. C. Riser, H. J. Freeland, D. Roemmich, S. Wijffels, A. Troisi, M. Belbéoch, D. Gilbert, J. Xu, S. Pouliquen, A. Thresher, P.-Y. L. Traon, G. Maze, B. Klein, M. Ravichandran, F. Grant, P.-M. Poulain, T. Suga, B. Lim, A. Sterl, P. Sutton, K.-A. Mork, P. J. Velez-Belchí, I. Ansorge, B. King, J. Turton, M. Baringer, S. R. Jayne, Fifteen years of ocean observations with the global argo array, Nature Climate Change 6 (1) (2016) 145–153.
- [5] T. Zhang, B. Tian, D. Sengupta, L. Zhang, Y. Si, Global offshore wind turbine dataset, Scientific Data 8 (1) (2021) 191.
- [6] M. Paleczny, E. Hammill, V. Karpouzi, D. Pauly, Population trend of the world's monitored seabirds, 1950-2010, PLOS ONE 10 (6) (2015) e0129342. doi:10.1371/journal.pone.0129342.
- [7] K. V. Rosenberg, A. M. Dokter, P. J. Blancher, J. R. Sauer, A. C. Smith, P. A. Smith, J. C. Stanton, A. Panjabi, L. Helft, M. Parr, P. P. Marra, Decline of the north american avifauna, Science 366 (6461) (2019) 120–124. doi:10.1126/science.aaw1313.
- [8] M. Sànchez-Marrè, U. Cortés, J. Comas, Environmental sciences and artificial intelligence, Environmental Modelling & Software 19 (9) (2004) 761 762, environmental Sciences and Artificial Intelligence. doi:https://doi.org/10.1016/j.envsoft.2003.08.009.
- [9] C. Bibby, M. Jones, S. Marsden, Expedition Field Techniques: Bird Surveys, Royal Geographical Society, London, 1998.
- [10] B. S. McIntosh, G. Alexandrov, K. Matthews, J. Mysiak, M. [van Ittersum], Preface: Thematic issue on the assessment and evaluation of environmental models and software, Environmental Modelling & Software 26 (3) (2011) 245 246, thematic issue on the assessment and evaluation of environmental models and software. doi:https://doi.org/10.1016/j.envsoft.2010.08.008.
- [11] A. Abu, R. Diamant, Feature set for classification of man-made underwater objects in optical and sas data, IEEE Sensors Journal 22 (6) (2022) 6027–6041. doi:10.1109/JSEN.2022.3148530.
- [12] Z. Han, J. Xing, X. Wang, F. Xue, J. Fan, A robust lcse-resnet for marine man-made target classification based on optical remote sensing imagery, International Journal on Artificial Intelligence Tools 31 (06) (2022) 2240022. doi:10.1142/S021821302240022X.
- [13] K. Kuru, W. Khan, Novel hybrid object-based non-parametric clustering approach for grouping similar objects in specific visual domains, Applied Soft Computing 62 (2018) 667 701. doi:https://doi.org/10.1016/j.asoc.2017.11.007.
- [14] K. Kuru, S. Girgin, K. Arda, U. Bozlar, A novel report generation approach for medical applications: The sisds methodology and its applications, International Journal of Medical Informatics 82 (5) (2013) 435–447. doi:https://doi.org/10.1016/j.ijmedinf.2012.05.019.
- [15] M. Mehrnejad, A. B. Albu, D. Capson, M. Hoeberechts, Detection of stationary animals in deep-sea video, in: 2013 OCEANS San Diego, 2013, pp. 1–5. doi:10.23919/OCEANS.2013.6741095.
- [16] J. Lopez, J. Schoonmaker, S. Saggese, Automated detection of marine animals using multispectral imaging, in: 2014 Oceans St. John's, 2014, pp. 1–6. doi:10.1109/OCEANS.2014.7003132.
- [17] J. Graber, Land-based Infrared Imagery for Marine Mammal Detection, Master's thesis, University of Washington, USA (2011).
- [18] G. Saur, S. Estable, K. Zielinski, S. Knabe, M. Teutsch, M. Gabel, Detection and classification of man-made offshore objects in terrasar-x and rapideye imagery: Selected results of the demarine-deko project, in: OCEANS 2011 IEEE Spain, 2011, pp. 1–10. doi:10.1109/Oceans-Spain.2011.6003596.
- [19] F. S. Leira, T. A. Johansen, T. I. Fossen, Automatic detection, classification and tracking of objects in the ocean surface from uavs using a thermal camera, in: 2015 IEEE Aerospace Conference, 2015, pp. 1–10. doi:10.1109/AER0.2015.7119238.
- [20] K. L. Davis, E. D. Silverman, A. L. Sussman, R. R. Wilson, E. F. Zipkin, Errors in aerial survey count data: Identifying pitfalls and solutions, Ecology and Evolution 12 (3) (2022) e8733. arXiv:https://onlinelibrary.wiley.com/doi/pdf/10.1002/ece3.8733, doi:https://doi.org/10.1002/ece3.8733.
- [21] N. Clements, W. Robinson, A re-survey of winter bird communities in the oregon coast range, USA, initially surveyed in 1968-1970, Biodiersity Data Journal (Aug. 2022). doi:10.3897/arphapreprints.e91575.
- [22] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Wildetect: An intelligent platform to perform airborne wildlife census automatically in the marine ecosystem using an ensemble of learning techniques and computer vision, Expert Systems with Applications 231 (2023) 120574. doi:https://doi.org/10.1016/j.eswa.2023.120574.
- [23] A. Noe, L. Pessoa, E. Thompson, Beyond the grand illusion: what change blindness really teaches us about vision, Visual Cognition 7 (2) (2000) 93–106.
- [24] A. Rosebrock, Face alignment with opency and python (2017) [cited 01.13.2022].
  URL http://www.pyimagesearch.com/2017/05/22/face-alignment-with-opency-and-python/
- [25] K. Kuru, Optimization and enhancement of h&e stained microscopical images by applying bilinear interpolation method on lab color mode, Theoretical Biology and Medical Modelling 11 (1) (2014) 9. doi:10.1186/1742-4682-11-9.
- [26] M. Loesdau, S. Chabrier, A. Gabillon, Hue and Saturation in the RGB Color Space, Springer International Publishing, Cham, 2014, pp. 203–212. doi:10.1007/978-3-319-07998-1\_23.
- [27] K. Gibert, J. S. Horsburgh, I. N. Athanasiadis, G. Holmes, Environmental data science, Environmental Modelling & Software 106 (2018) 4 – 12, special Issue on Environmental Data Science. Applications to Air quality and Water cycle. doi:https://doi.org/10.1016/j.envsoft.2018.04.005.
- [28] H. Xing, Z. Xiao, D. Zhan, S. Luo, P. Dai, K. Li, Selfmatch: Robust semisupervised time-series classification with self-distillation, International Journal of Intelligent Systems 37 (11) (2022) 8583–8610. doi:https://doi.org/10.1002/int.22957.
- [29] Z. Xiao, H. Zhang, H. Tong, X. Xu, An efficient temporal network with dual self-distillation for electroencephalography signal classi-

- fication, in: 2022 IEEE International Conference on Bioinformatics and Biomedicine (BIBM), 2022, pp. 1759-1762. doi:10.1109/BIBM55620.2022.9995049.
- [30] H. Xing, Z. Xiao, R. Qu, Z. Zhu, B. Zhao, An efficient federated distillation learning system for multitask time series classification, IEEE Transactions on Instrumentation and Measurement 71 (2022) 1–12. doi:10.1109/TIM.2022.3201203.
- [31] A. Çalışkan, Detecting human activity types from 3d posture data using deep learning models, Biomedical Signal Processing and Control 81 (2023) 104479. doi:https://doi.org/10.1016/j.bspc.2022.104479.
- [32] K. Kuru, D. Ansell, M. Jones, B. J. Watkinson, N. Caswell, P. Leather, A. Lancaster, P. Sugden, E. Briggs, C. Davies, T. C. Oh, K. Bennett, C. De Goede, Intelligent autonomous treatment of bedwetting using non-invasive wearable advanced mechatronics systems and mems sensors: Intelligent autonomous bladder monitoring to treat ne, Medical & Biological Engineering & Computing 58 (5) (2020) 943–65. doi:10.1007/s11517-019-02091-x.
- [33] K. Kuru, et al., Iotfauav: Intelligent remote monitoring of livestock in large farms using autonomous uninhabited aerial vehicles, Computers and Electronics in Agriculture (2023).
- [34] K. Kuru, D. Ansell, B. Jon Watkinson, D. Jones, A. Sujit, J. M. Pinder, C. L. Tinker-Mill, Intelligent automated, rapid and safe landmine and unexploded ordnance (uxo) detection using multiple sensor modalities mounted on autonomous drones, IEEE Transactions on Geoscience and Remote Sensing (2023).
- [35] K. Kuru, A. Sujit, D. Ansell, J. M. Pinder, B. Jon Watkinson, D. Jones, R. Hamila, C. Tinker-Mill, Iintelligent, automated, rapid, and safe landmine, improvised explosive device and unexploded ordnance detection using maggy, IEEE Access (2024).
- [36] K. Kuru, Platform to test and evaluate human-in-the-loop telemanipulation schemes for autonomous unmanned aerial systems, in: IEEE/ASME MESA 2024 20th Int. Conference on Mechatronic, Embedded Systems and Applications, 2024.
- [37] K. Kuru, Technical report: Analysis of intervention modes in human-in-the-loop (hitl) teleoperation with autonomous unmanned aerial systems, Central Lancashire online Knowledge (2024).
- [38] K. Kuru, Human-in-the-loop telemanipulation schemes for autonomous unmanned aerial systems, in: 2024 4th Interdisciplinary Conference on Electrics and Computer (INTCEC), 2024, pp. 1–6. doi:10.1109/INTCEC61833.2024.10603071.
- [39] K. Kuru, O. Erogul, C. Xavier, Autonomous low power monitoring sensors, Sensors 21 (2021).
- [40] K. Kuru, D. Ansell, D. Jones, B. Watkinson, J. M. Pinder, J. A. Hill, E. Muzzall, C. Tinker-Mill, K. Stevens, A. Gardner, Intelligent airborne monitoring of livestock using autonomous uninhabited aerial vehicles, in: The 11th European Conference on Precision Livestock Farming, 2024
- [41] K. Kuru, Use of autonomous uninhabited aerial vehicles safely within mixed air traffic, in: Proceedings of Global Conference on Electronics, Communications and Networks (GCECN2024), 2023.
- [42] K. Kuru, Technical report: Essential development components of the urban metaverse ecosystem, Central Lancashire online Knowledge (2024).
- [43] K. Kuru, Technical report: Analysis of intervention modes in human-in-the-loop (hitl) teleoperation with autonomous ground vehicle systems, Central Lancashire online Knowledge (2022).
- [44] K. Kuru, Metaomnicity: Toward immersive urban metaverse cyberspaces using smart city digital twins, IEEE Access 11 (2023) 43844–68. doi:10.1109/ACCESS.2023.3272890.
- [45] K. Kuru, Sensors and sensor fusion for decision making in autonomous driving and vehicles (2023).
- [46] K. Kuru, Telemanipulation of autonomous drones using digital twins of aerial traffic, IEEE Dataport (2024). doi:10.21227/kn5m-z290.
- [47] K. Kuru, A Novel Hybrid Clustering Approach for Unsupervised Grouping of Similar Objects, Springer International Publishing, 2014, p. 642–653. doi:10.1007/978-3-319-07617-1\_56.
- [48] K. Kuru, Optimization and enhancement of h&e stained microscopical images by applying bilinear interpolation method on lab color mode, Theoretical Biology and Medical Modelling 11 (1) (2014). doi:10.1186/1742-4682-11-9.
- [49] K. Kuru, Definition of multi-objective deep reinforcement learning reward functions for self-driving vehicles in the urban environment, IEEE Trans. Veh. Technol. 11 (2024) 1–12.
- [50] K. Kuru, Management of geo-distributed intelligence: Deep insight as a service (DINSaaS) on forged cloud platforms (FCP), Journal of Parallel and Distributed Computing 149 (2021) 103–118. doi:10.1016/j.jpdc.2020.11.009.
- [51] K. Kuru, D. Ansell, Tcitysmartf: A comprehensive systematic framework for transforming cities into smart cities, IEEE Access 8 (2020) 18615–18644. doi:10.1109/ACCESS.2020.2967777.
- [52] K. Kuru, K. Kuru, Urban metaverse cyberthreats and countermeasures to mitigate them, in: Proceedings of IEEE Sixth International Conference on Blockchain Computing and Applications (BCCA 2024), 2024.
- [53] K. Kuru, Conceptualisation of human-on-the-loop haptic teleoperation with fully autonomous self-driving vehicles in the urban environment, IEEE Open J. Intell. Transp. Syst. 2 (2021) 448–69. doi:10.1109/0JITS.2021.3132725.
- [54] K. Kuru, J. M. Pinder, B. J. Watkinson, D. Ansell, K. Vinning, L. Moore, C. Gilbert, A. Sujit, D. Jones, Toward mid-air collision-free trajectory for autonomous and pilot-controlled unmanned aerial vehicles, IEEE Access 11 (2023) 100323–100342. doi:10.1109/ACCESS.2023.3314504.
- [55] K. Kuru, Planning the future of smart cities with swarms of fully autonomous unmanned aerial vehicles using a novel framework, IEEE Access 9 (2021) 6571–6595. doi:10.1109/ACCESS.2020.3049094.
- [56] K. Kuru, W. Khan, A framework for the synergistic integration of fully autonomous ground vehicles with smart city, IEEE Access 9 (2021) 923–948. doi:10.1109/ACCESS.2020.3046999.
- [57] K. Kuru, Trustfsdv: Framework for building and maintaining trust in self-driving vehicles, IEEE Access 10 (2022) 82814–82833. doi: 10.1109/ACCESS.2022.3196941.
- [58] K. Kuru, D. Ansell, W. Khan, H. Yetgin, Analysis and optimization of unmanned aerial vehicle swarms in logistics: An intelligent delivery platform, IEEE Access 7 (2019) 15804–31. doi:10.1109/ACCESS.2019.2892716.
- [59] K. Kuru, K. Kuru, Blockchain-enabled privacy-preserving machine learning authentication with immersive devices for urban metaverse cyberspaces, in: 2024 20th IEEE/ASME International Conference on Mechatronic and Embedded Systems and Applications (MESA), 2024, pp. 1–8. doi:10.1109/MESA61532.2024.10704877.

- [60] K. Kuru, B. J. Watkinson, D. Ansell, D. Hughes, M. Jones, N. Caswell, P. Leather, K. Bennett, P. Sugden, C. Davies, C. DeGoede, Smart wearable device for nocturnal enuresis, in: 2023 IEEE EMBS Special Topic Conference on Data Science and Engineering in Healthcare, Medicine and Biology, 2023, pp. 95–96. doi:10.1109/IEEECONF58974.2023.10404506.
- [61] K. Kuru, Technical report: Big data-concepts, infrastructure, analytics, challenges and solutions (2024).
- [62] K. Kuru, D. Ansell, D. Hughes, B. J. Watkinson, F. Gaudenzi, M. Jones, D. Lunardi, N. Caswell, A. R. Montiel, P. Leather, D. Irving, K. Bennett, C. McKenzie, P. Sugden, C. Davies, C. Degoede, Treatment of nocturnal enuresis using miniaturised smart mechatronics with artificial intelligence, IEEE Journal of Translational Engineering in Health and Medicine 12 (2024) 204–214. doi:10.1109/JTEHM.2023.3336889.
- [63] K. Kuru, M. Niranjan, Y. Tunca, Establishment of a diagnostic decision support system in genetic dysmorphology, in: 2012 11th International Conference on Machine Learning and Applications, Vol. 2, 2012, pp. 164–169. doi:10.1109/ICMLA.2012.234.
- [64] J. Lowe, K. Kuru, Design & development of a smart blind system using fuzzy logic, in: 2024 20th IEEE/ASME International Conference on Mechatronic and Embedded Systems and Applications (MESA), 2024, pp. 1–8. doi:10.1109/MESA61532.2024.10704868.
- [65] J. Lowe, K. Kuru, Development of machine intelligence for self-driving vehicles through video capturing, in: 2024 20th IEEE/ASME International Conference on Mechatronic and Embedded Systems and Applications (MESA), 2024, pp. 1–8. doi:10.1109/ MESA61532.2024.10704876.
- [66] K. Kuru, S. Worthington, D. Ansell, J. M. Pinder, A. Sujit, B. Jon Watkinson, K. Vinning, L. Moore, C. Gilbert, D. Jones, et al., Aitl-wing-hitl: Telemanipulation of autonomous drones using digital twins of aerial traffic interfaced with wing, Robotics and Autonomous Systems 180 (2024).
- [67] K. Kuru, K. Kuru, Urban metaverse cyberspaces & blockchain-enabled privacy-preserving machine learning authentication with immersive devices, in: Proceedings of IEEE Sixth International Conference on Blockchain Computing and Applications (BCCA 2024), 2024.
- [68] K. Kuru, K. Kuru, Urban metaverse cybercommunities & blockchain-based privacy-preserving deep learning authentication and verification with immersive metaverse devices, in: Proceedings of IEEE Sixth International Conference on Blockchain Computing and Applications (BCCA 2024), 2024.
- [69] K. Kuru, K. Kuru, Urban metaverse cyberthreats and countermeasures against these threats, in: Proceedings of IEEE Sixth International Conference on Blockchain Computing and Applications (BCCA 2024), 2024.
- [70] K. Kuru, S. Girgin, K. Arda, U. Bozlar, V. Akgün, Developing Diagnostic DSSs Based on a Novel Data Collection Methodology, Springer Berlin Heidelberg, 2009, p. 110–121. doi:10.1007/978-3-642-10488-6\_14.
- [71] K. Kuru, S. Girgin, K. Arda, A Novel Multilingual Report Generation System for Medical Applications, Springer Berlin Heidelberg, 2009, p. 201–205. doi:10.1007/978-3-642-02976-9\_29.
- [72] K. Kuru, A novel report generation system for medical applications (2009).
- [73] K. Kuru, M. Niranjan, Y. Tunca, E. Osvank, T. Azim, Biomedical visual data analysis to build an intelligent diagnostic decision support system in medical genetics, Artificial Intelligence in Medicine 62 (2) (2014) 105–118. doi:10.1016/j.artmed.2014.08.003.
- [74] K. Kuru, W. Khan, Novel hybrid object-based non-parametric clustering approach for grouping similar objects in specific visual domains, Appl. Soft Comput. 62 (2018) 667–701.
- [75] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Wildetect: An intelligent platform to perform airborne wildlife census automatically in the marine ecosystem using an ensemble of learning techniques and computer vision, Expert Systems with Applications 231 (2023) 120574. doi:10.1016/j.eswa.2023.120574.
- [76] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Intelligent airborne monitoring of irregularly shaped man-made marine objects using statistical machine learning techniques, Ecological Informatics 78 (2023) 102285. doi:10.1016/j.ecoinf.2023.102285.
- [77] K. Kuru, Joint cognition of remote autonomous robotics agent swarms in collaborative decision-making & remote human-robot teaming, Proceedings of The Premium Global Conclave and Expo on Robotics & Automation (AUTOROBO, EXPO2024) (2024).
- [78] N. Caswell, K. Kuru, D. Ansell, M. J. Jones, B. J. Watkinson, P. Leather, A. Lancaster, P. Sugden, E. Briggs, C. Davies, C. Oh, K. Bennett, C. DeGoede, Patient engagement in medical device design: Refining the essential attributes of a wearable, pre-void, ultrasound alarm for nocturnal enuresis, Pharmaceutical Medicine 34 (1) (2020) 39–48. doi:10.1007/s40290-019-00324-w.
- [79] K. Kuru, D. Ansell, M. Jones, C. De Goede, P. Leather, Feasibility study of intelligent autonomous determination of the bladder voiding need to treat bedwetting using ultrasound and smartphone ml techniques: Intelligent autonomous treatment of bedwetting, Medical & Biological Engineering & Computing 57 (5) (2018) 1079–1097. doi:10.1007/s11517-018-1942-9.
- [80] K. Kuru, S. Girgin, K. Arda, U. Bozlar, A novel report generation approach for medical applications: The sisds methodology and its applications, International Journal of Medical Informatics 82 (5) (2013) 435–447. doi:10.1016/j.ijmedinf.2012.05.019.
- [81] K. Kuru, K. Kuru, Blockchain-based decentralised privacy-preserving machine learning authentication and verification with immersive devices in the urban metaverse ecosystem (2024). doi:10.20944/preprints202402.0317.v1.
- [82] K. Kuru, S. Girgin, A Bilinear Interpolation Based Approach for Optimizing Hematoxylin and Eosin Stained Microscopical Images, Springer Berlin Heidelberg, 2011, p. 168–178. doi:10.1007/978-3-642-24855-9\_15.
- [83] K. Kuru, Use of wearable miniaturised medical devices with artificial intelligence (ai) in enhancing physical medicine, Proceedings of Enhancing Physical Medicine. In: World Congress on Physical Medicine and Rehabilitation (2024).
- [84] K. Kuru, A. Sujit, D. Ansell, J. M. Pinder, D. Jones, B. Watkinson, R. Hamila, C. L. Tinker-Mill, Non-invasive detection of landmines, unexploded ordnances and improvised explosive devices using bespoke unmanned aerial vehicles, Proceedings of EEE International Conference on Electrical and Computer Engineering Researches (ICECER'24) (2024).
- [85] K. Kuru, Technical report: Towards state and situation awareness for driverless vehicles using deep neural networks, Central Lancashire online Knowledge (2024).
- [86] K. Kuru, Technical report: Human-in-the-loop telemanipulation platform for automation-in-the-loop unmanned aerial systems, Central Lancashire online Knowledge (2024).
- [87] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Wildetect-part i, Coordinates 20 (5) (2024) 19-29.
- [88] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Wildetect-part ii, Coordinates 20 (6) (2024) 17–25.
- [89] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Intelligent airborne monitoring of irregularly shaped man-made marine objects using statistical machine learning techniques, Ecological Informatics 78 (2023) 102285. doi:10.1016/j.ecoinf.2023.102285.
- [90] K. Kuru, S. Clough, D. Ansell, J. McCarthy, S. McGovern, Intelligent airborne monitoring of man-made marine objects using Machine Learning techniques Part I, Coordinates, 20 (10). pp. 18-28.